

Crooked Path

Designed by Diane Nagle
Featuring Sussex by Nancy Gere
SIZE: 58" x 70"

FREE
PROJECT









THIS IS A DIGITAL REPRESENTATION OF THE QUILT TOP, FABRIC MAY VARY.

PLEASE NOTE: BEFORE MAKING YOUR PROJECT, CHECK FOR ANY PATTERN UPDATES AT WINDHAMFABRICS.COM'S FREE PROJECTS SECTION.



Crooked Path

Cutting Note: It is very important to mark and store the cut pieces according to size, as this will make it much easier when you start piecing.

KEY	FABRIC	SKU	YD	CUTTING INSTRUCTIONS
A		50472-3 Charcoal	1 3/4	(2) 2 1/2" x 42" strips; cut into (20) 2 1/2" squares. (3) 9 1/4" x 42" strips; cut (20) Templates A and (20) Templates B. (6) 1 1/2" x 42" strips, Sew end to end and cut into (2) 1 1/2" x 60 1/2" strips and (2) 1 1/2" x 50 1/2" strips. (7) 2 1/2" x 42" binding strips.
B		50474-3 Charcoal	3/4	(4) 2 1/2" x 42" strips; cut into (20) 2 1/2" x 6 1/2" rectangles. (5) 2 1/2" x 42" strips; cut into (20) 2 1/2" x 8 1/2" rectangles.
C		50473-5 Grey	1 1/8	(3) 9 1/4" x 42" strips; cut (20) Templates A and (20) Templates B. (2) 4 7/8" x 42" strips; cut into (10) 4 7/8" squares, cut once on diagonal.
D		50472-1 Rose	1 3/4	(2) 4 7/8" x 42" strips; cut into (10) 4 7/8" squares, cut once on diagonal. (4) 2 1/2" x 42" strips; cut into (60) 2 1/2" squares. (5) 4 1/2" x 42" strips. Sew end to end and cut (2) 4 1/2" x 62 1/2" strips and (2) 4 1/2" x 58 1/2" strips.
E		50478-3 Charcoal	1/2	(5) 2 1/2" x 42" strips; cut into (80) 2 1/2" squares.
F		50475-3 Charcoal	1/4	(2) 2 1/2" x 42" strips; cut into (20) 2 1/2" squares.
		Backing	3 3/4	60" x 72" piece of batting.



Crooked Path

Block Assembly

Nos-Gay Block:

1. Sew the long sides of a Fabric **A** and **C** Template A together to make Rectangle A as shown. Square up to $4\frac{1}{2} \times 8\frac{1}{2}$ ". Set aside.

Rectangle A



2. Sew the long sides of a Fabric **A** and **C** Template B together to make Rectangle B as shown. Square up to $4\frac{1}{2} \times 8\frac{1}{2}$ ". Set aside.

Rectangle B



3. Sew a Fabric **D** $2\frac{1}{2}$ " square to both sides of a Fabric **E** $2\frac{1}{2}$ " square as shown. Square up to $6\frac{1}{2} \times 2\frac{1}{2}$ ".



4. Sew a Fabric **E** $2\frac{1}{2}$ " square to both sides of a Fabric **F** $2\frac{1}{2}$ " square as shown. Square up to $6\frac{1}{2} \times 2\frac{1}{2}$ ".



5. Sew a Fabric **A** $2\frac{1}{2}$ " square to the left side of a Fabric **E** $2\frac{1}{2}$ " square. Sew a Fabric **D** $2\frac{1}{2}$ " square to the right side of the unit. Square up to $6\frac{1}{2} \times 2\frac{1}{2}$ ".



6. Sew the unit in Step 4 to the bottom of the unit in Step 3. Sew the unit in Step 5 to the bottom of the unit in Step 4 to complete a 9 Patch Unit. Square up to $6\frac{1}{2}$ ".

9 Patch Unit





Crooked Path

7. Sew a Fabric **B** $2\frac{1}{2}'' \times 6\frac{1}{2}''$ rectangle to the right side of the 9 Patch Unit as shown. Square up to $8\frac{1}{2}'' \times 6\frac{1}{2}''$.



8. Sew a Fabric **B** $2\frac{1}{2}'' \times 8\frac{1}{2}''$ rectangle to the top of the unit in Step 7. Square up to $8\frac{1}{2}''$.



9. Sew a Rectangle A to the left side of the unit in Step 8. Square up to $12\frac{1}{2}'' \times 8\frac{1}{2}''$. Set aside.



10. Sew the long sides of a Fabric **C** and **D** triangle together to make a Half Square Triangle (HST). Square up to $4\frac{1}{2}''$.





Crooked Path

11. Sew the HST in Step 10 to the left end of a Rectangle B as shown. Square up to 12 1/2" x 2 1/2".



12. Sew the unit in Step 11 to the bottom of the unit in Step 9 to complete the Nos-Gay Block. Square up to 12 1/2". Make 20.


Nos-Gay Block



Assembly of Rows

The quilt center is made of 5 horizontal rows of 4 blocks each, with every other block rotated. Following the diagrams for placement and rotation of each block, sew each row as shown from left to right.


13. Row 1: Sew 4 Nos-Gay Block in a row, starting with the rotation shown in Step 12, then alternating the second and 4 blocks as shown below. Make 3 rows.

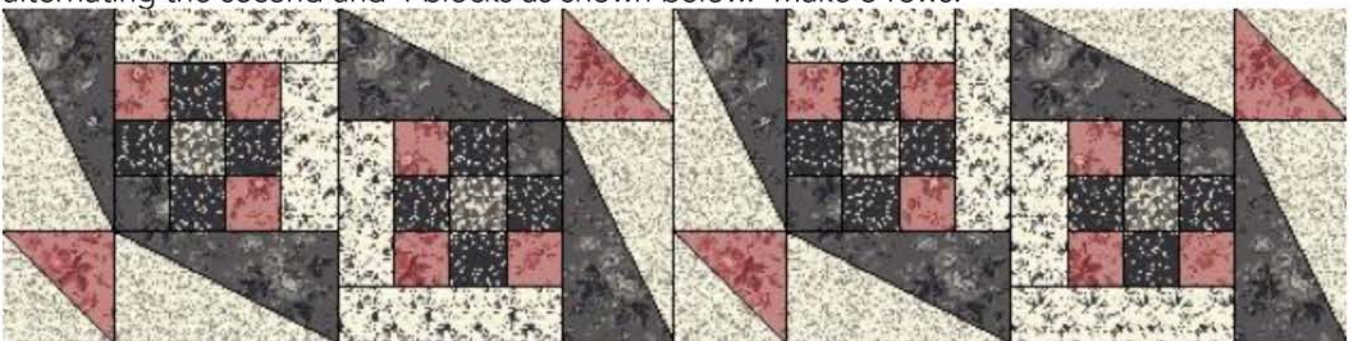



Crooked Path

14. Row 2: Sew 4 Nos-Gay Block in a row, starting with a rotated block, alternating with the block rotation shown in Step 12. Make 2 rows.

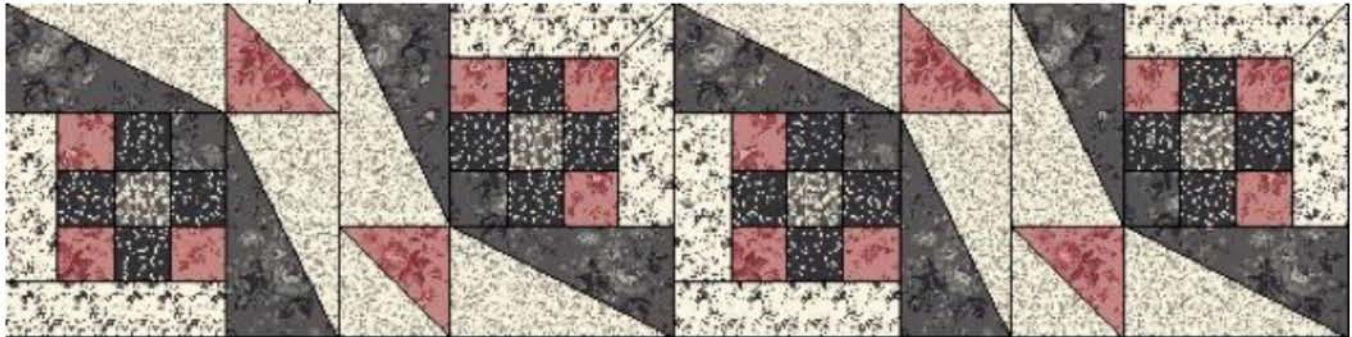


15. Sew the rows together working from top to bottom in this order: Row 1, Row 2, Row 1, Row 2 and last row on the bottom of the quilt is a Row 1. See Diagram below.

Row 1




Row 2

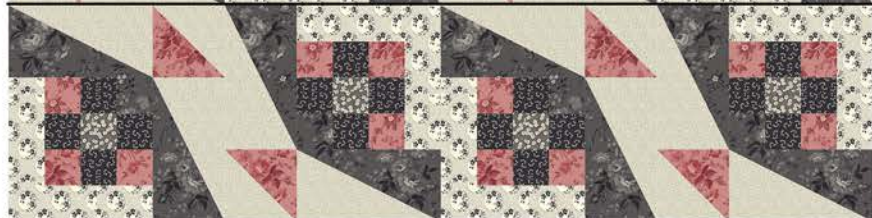

Row 1



Row 2

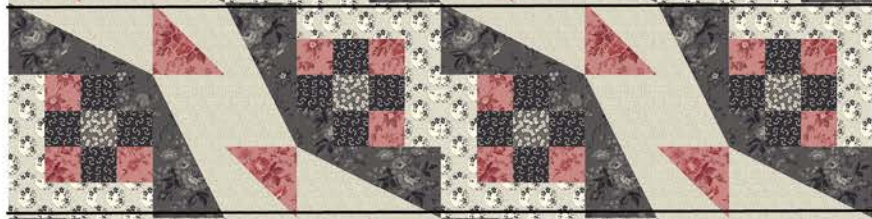

Row 1





Crooked Path

Inner Border

16. Sew the Fabric **A** 1 ½" x 60 ½" strips to the sides of the quilt. Sew the Fabric **A** 1 ½" x 50 ½" strips to the top and bottom of the quilt.

Outer Border

17. Sew the Fabric **D** 4 ½" x 62 ½" strips to the sides of the quilt. Sew the Fabric **D** 4 ½" x 58 ½" strips to the top and bottom of the quilt.

18. Layer the quilt top with batting and backing; quilt as desired. Using the Fabric **A** 2 ½" strips bind the edges to finish.




A

Crooked Path Template
Please print at 100%.

1" Reference



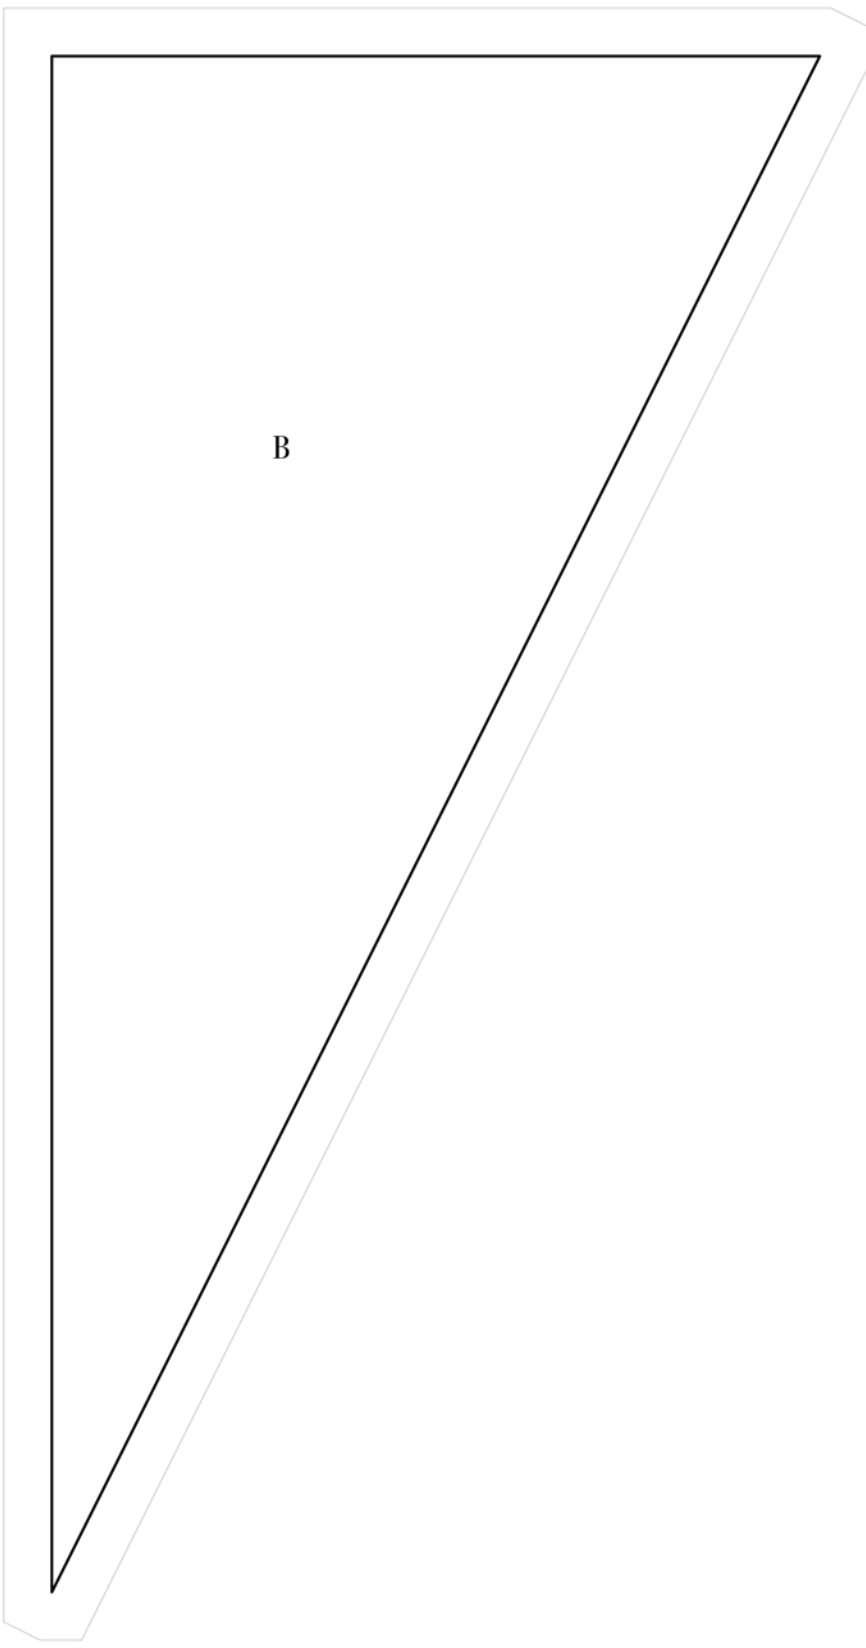

B

Crooked Path Template
Please print at 100%.

1" Reference

