

ELEMENTAL

-Kristy Daum-

Quilt Measures – approx. 54" x 54"

Windham Fabrics

Fabric Requirements: ELEMENTAL

Fabric	Quantity Needed
43211-1 Midnight	5/8 yard
43214-2 White	1 5/8 yards
43214-1 Midnight	1/3 yard
43215-3 Cobalt	3/4 yard
43216-3 Cobalt	3/4 yard

Fabric	Quantity Needed
Backing	3 1/2 yards
Binding ::: 43216-1 Midnight	1/2 yard

Before You Begin:

- Read through all directions first
- All seam allowances are a scant 1/4"
- RST stands for "Right Sides Together"
- WOF stands for "Width of Fabric"
- Fabric requirement assumes 40" between selvages
- Extra fabric will be required if using directional prints or if pre-washing your fabric

Cutting Instructions for Blocks

A

- Cut (4) 5" x WOF strips, sub-cut each into (7) 5" x 5" squares for a total of 28. This project only requires 24 squares, so there will be 4 extra.

B

- Cut (6) 5" x WOF strips, sub-cut each into (7) 5" x 5" squares for a total of 42. This project only requires 40 squares, so there will be 2 extra.

C

- Cut (2) 4 1/2" x WOF strips, sub-cut each into (8) 4 1/2" x 4 1/2" squares for a total of 16.

D

- Cut (2) 4 1/2" x WOF strips, sub-cut each into (8) 4 1/2" x 4 1/2" squares for a total of 16.
- Cut (3) 5" x WOF strips, sub-cut each into (7) 5" x 5" squares for a total of 21. This project only requires 16 squares, so there will be 5 extra.

E

- Cut (2) 4 1/2" x WOF strips, sub-cut each into (8) 4 1/2" x 4 1/2" squares for a total of 16.
- Cut (3) 5" x WOF strips, sub-cut each into (7) 5" x 5" squares for a total of 21. This project only requires 16 squares, so there will be 5 extra.


Cutting Instructions for Sashing

White 43214-2

- Cut (4) 2 1/2" x WOF strips, sub-cut each into (3) 2 1/2" x 12 1/2" rectangles for a total of 12. These rectangles will make up the vertical sashing.
- Cut (5) 2 1/2" x WOF strips, put three aside. Cut the remaining two in half so you end up with four shorter lengths approx. 2 1/2" x 20-22". This project only requires three shorter lengths, so there will be 1 extra.

Piecing The HST (Half Square Triangles):

1. Take (1) 5" x 5" White 43214-2 square and (1) 5" x 5" Cobalt 43215-3 square and place them RST.
2. With a pencil, mark a diagonal line from one corner to the next.
3. Sew a scant 1/4" away from the pencil line on both sides as shown in the diagram.
4. Cut on the line, separating the two halves; which now creates 2 HST (Half Square Triangles). Trim each HST to 4 1/2" x 4 1/2".
5. Repeat the above steps until you have the following HSTS completed. If using directional fabric, pay close attention to the direction in which the diagonal line is heading prior to sewing.
 - Total of (16) HST using White 43214-2 and Cobalt 43215-3
 - Total of (48) HST using White 43214-2 and Midnight 43211-1
 - Total of (16) HST using White 43214-2 and Cobalt 43216-3
 - Total of (16) HST using Cobalt 43215-3 and Cobalt 43216-3

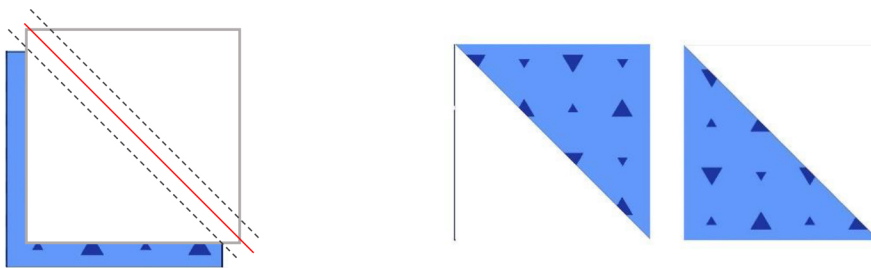


Laying Out The Blocks to create Unit A:

6. Make 8
7. Following the diagram, lay out the HSTs as shown.
8. Add in the three 4 1/2" x 4 1/2" squares.
9. Sew the blocks RST one row at a time. Press and repeat until all rows are finished.
10. Sew the rows RST matching up the seams. Press.
11. Sq to 12 1/2"




Laying Out The Blocks to create Unit B:

12. Make 8
13. Following the diagram, lay out the HSTs as shown. For reference, Unit B is the mirror image of Unit A.
14. Add in the three $4\frac{1}{2}$ " x $4\frac{1}{2}$ " squares.
15. Sew the blocks RST one row at a time. Press and repeat until all rows are finished.
16. Sew the rows RST matching up the seams. Press.
17. Square to $12\frac{1}{2}$ "

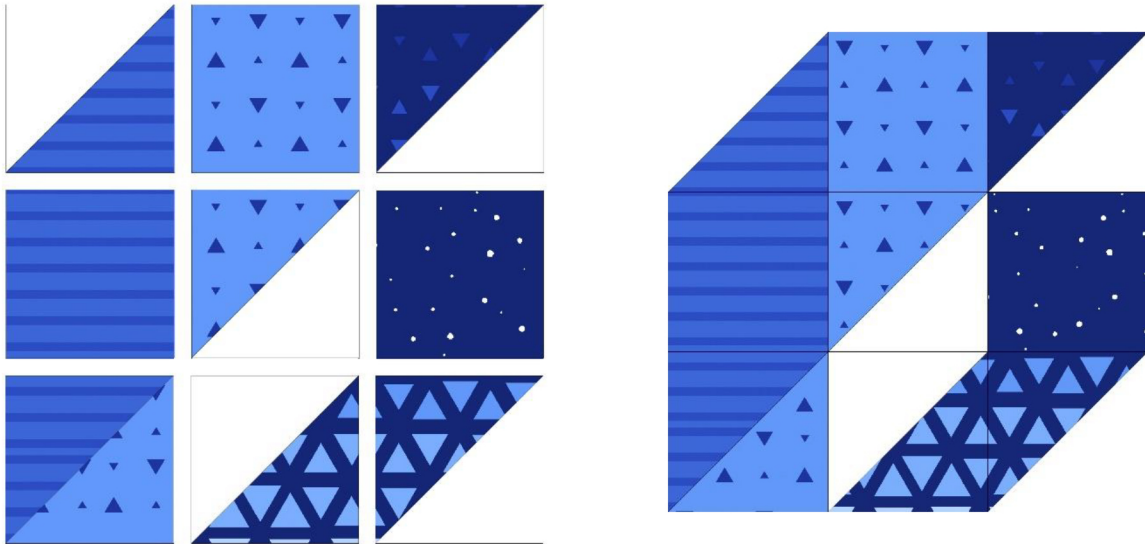

Piecing the Quilt Top:

18. Following the diagram, layout Units A and Units B rotating as necessary.
19. Add in the $2\frac{1}{2}$ " x $12\frac{1}{2}$ " White 43214-2 vertical sashing rectangles and sew them RST to the Units. Press.
20. Finish the four rows and lay them aside.
21. Take one $2\frac{1}{2}$ " x WOF White 43214-2 sashing strip and sew it to one of the shorter $2\frac{1}{2}$ " x 20-22"
22. White 43214-2 sashing strips. Press.
23. Trim sashing strip to $2\frac{1}{2}$ " x $54\frac{1}{2}$ ". Make 3
24. Sew (1) white $2\frac{1}{2}$ " x $54\frac{1}{2}$ " sashing strip to the bottom of row 1. Then sew to row 2.
25. Repeat step with remaining rows and sashing strips as shown in diagram.
26. Square up the quilt top as needed.

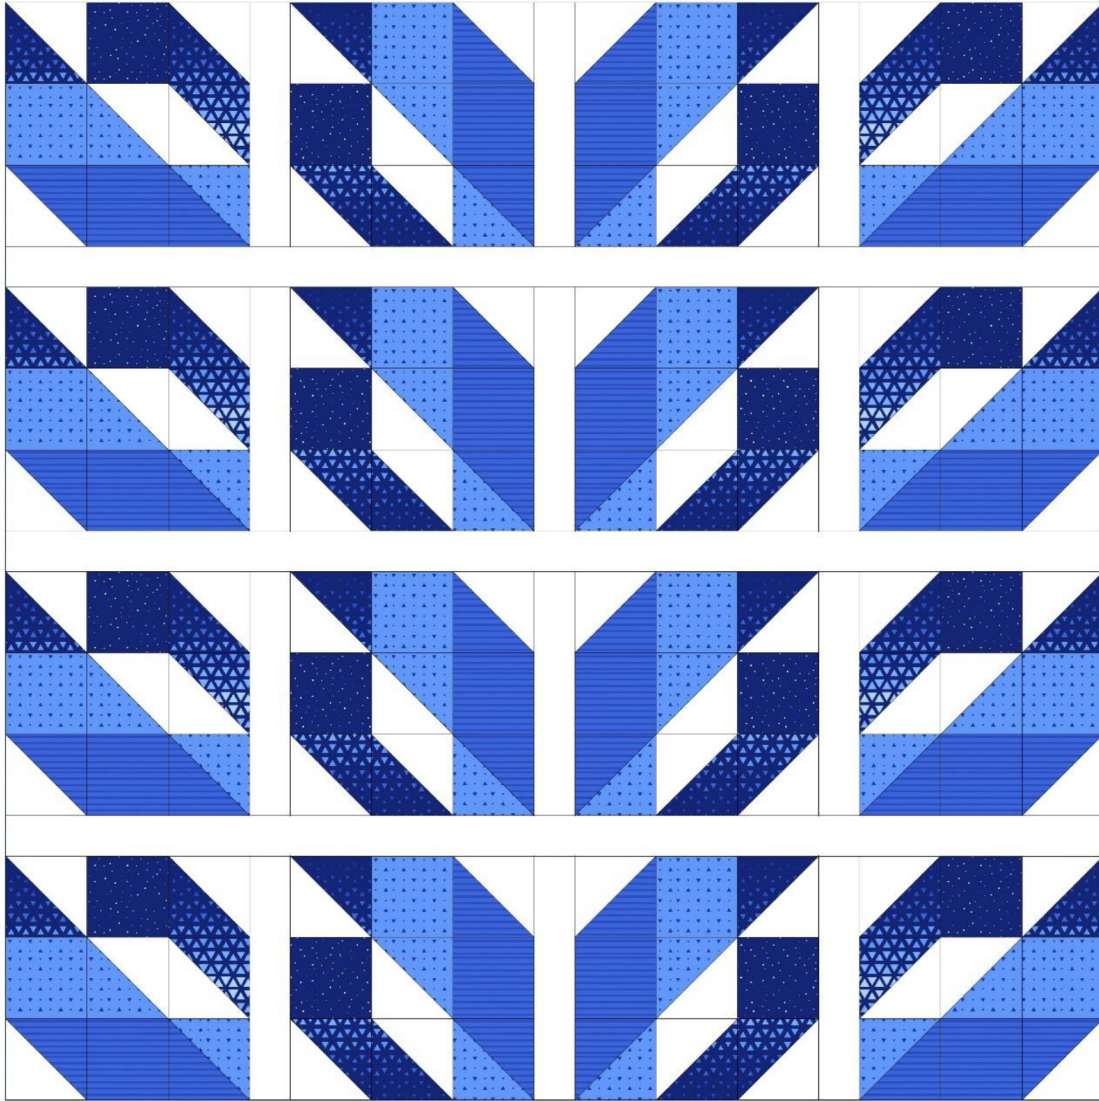

Finishing The Quilt:

- Due to the size of the quilt, you will need to piece the back. Please be sure to leave a minimum of 4" excess on all sides for ease of quilting.
- Press your quilt top and backing, so they are wrinkle-free and flat.
- Layer your quilt top, batting and backing.
- Baste.
- Quilt as desired.
- Bind the quilt using your favorite method